

SELECTION GUIDE



SERIES	DH500
DRILLING DEPTH	3XD
LENGTH	SHORT
SIZE MIN	D2.6
SIZE MAX	D14.0
PAGE	A151
SURFACE TREATMENT	TiAIN

# SOLID CARBIDE DREAM DRILLS for HIGH HARDENED STEELS

For High Hardened Steels (HRc50 to HRc70)

Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A151

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc
P	1	Non-alloy steel	About 0.15% C Annealed	125	
	2		About 0.45% C Annealed	190	13
	3		About 0.45% C Quenched & Tempered	250	25
	4		About 0.75% C Annealed	270	28
	5		About 0.75% C Quenched & Tempered	300	32
	6	Low alloy steel	Annealed	180	10
	7		Quenched & Tempered	275	29
	8		Quenched & Tempered	300	32
	9		Quenched & Tempered	350	38
	10		High alloyed steel, and tool steel	Annealed	200
	11		Quenched & Tempered	325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15
	13		Martensitic Quenched & Tempered	240	23
	14		Austenitic	180	10
K	15	Grey cast iron	Pearlitic / ferritic	180	10
	16		Pearlitic (Martensitic)	260	26
	17	Nodular cast iron	Ferritic	160	3
	18		Pearlitic	250	25
	19	Malleable cast iron	Ferritic	130	
	20		Pearlitic	230	21
N	21	Aluminum-wrought alloy	Not Curable	60	
	22		Curable Hardened	100	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75	
	24		≤ 12% Si, Curable Hardened	90	
	25		> 12% Si, Not Curable	130	
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110	
	27		CuZn, CuSnZn (Brass)	90	
	28		CuSn, lead-free copper and electrolytic copper	100	
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic		
	30		Rubber, Wood, etc.		
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
	32		Cured	280	30
	33		Annealed	250	25
	34		Cured	350	38
	35		Cast	320	34
	36	Titanium Alloys	Pure Titanium	400 Rm	
	37		Alpha + Beta Alloys Hardened	1050 Rm	
H	38	Hardened steel	Hardened	550	55
	39.1		Hardened	630	60
	39.3		Hardened	70	
	40		Chilled Cast Iron	Cast	400
41	Hardened Cast Iron	Hardened	550	55	



## YG DREAM DRILLS for HIGH HARDENED STEELS

DH500 SERIES

### CARBIDE, DREAM DRILLS for HIGH HARDENED STEELS (HRc50~HRc70)


SHORT

- VOLLHARTMETALL DREAM SPIRALBOHRER FÜR HOCHGEHARTETE STAHL
- Forets DREAM DRILLS carbure pour Aciers Trempés (50 HRc ~ 70 HRc)
- PUNTE ELICOIDALI IN MD, DREAM DRILL - ACCIAI HRC 50 - 70

KURZ  
COURTE  
CORTA

- ▶ Drilling for High Hardened Steels; Quenched Steels, Tempered Steels (under HRc 70)
- ▶ Special geometry design for Hardened Steels
- ▶ Minimum of cutting load through special thinning
- ▶ Performing good chip removal and powerful drilling

- ▶ Bohren von hoch gehärteten Stählen, Vergütungsstähle, angelassenen Stählen bis HRc 70
- ▶ Spezielle Bohrergeometrie für gehärtete Stähle
- ▶ Minimaler Schnedendruck durch spezielle Ausspitzung
- ▶ Gute Spanabfuhr und Hochleistungsbohren

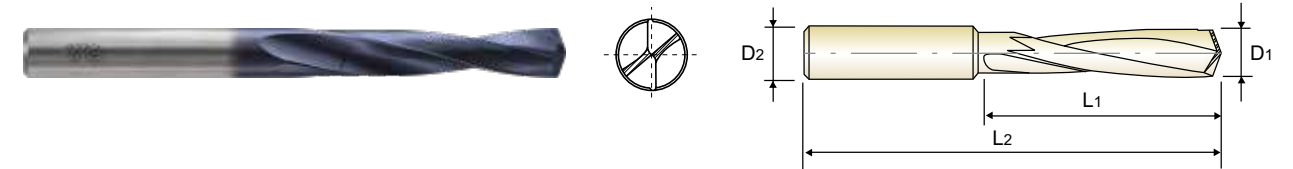

3 x D

Plain Shank	Page
SHRINK FIT HOLDER	D47-72
HYDRAULIC CHUCK	D15-46
ER COLLET CHUCK	D73-115

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
DH500026	2.6	3	14	44	DH500070	7.0	8	45	85
DH500030	3.0	3	16	46	DH500075	7.5	8	45	85
DH500033	3.3	4	18	48	DH500080	8.0	8	50	98
DH500034	3.4	4	20	50	DH500085	8.5	10	50	98
DH500035	3.5	4	20	50	DH500086	8.6	10	57	105
DH500040	4.0	4	22	52	DH500088	8.8	10	57	105
DH500042	4.2	6	25	65	DH500090	9.0	10	57	105
DH500043	4.3	6	28	68	DH500095	9.5	10	57	105
DH500044	4.4	6	28	68	DH500100	10.0	10	63	111
DH500045	4.5	6	28	68	DH500102	10.2	12	63	111
DH500050	5.0	6	32	72	DH500103	10.3	12	63	111
DH500051	5.1	6	32	72	DH500105	10.5	12	63	111
DH500052	5.2	6	32	72	DH500108	10.8	12	71	119
DH500055	5.5	6	35	75	DH500110	11.0	12	71	119
DH500060	6.0	6	35	75	DH500115	11.5	12	71	119
DH500065	6.5	8	40	80	DH500120	12.0	12	71	119
DH500068	6.8	8	45	85	DH500140	14.0	14	77	125
DH500069	6.9	8	45	85					

CUTTING CONDITIONS

### DH500 SERIES DREAM DRILLS for HIGH HARDENED STEELS

VC = M/MIN  
RPM = rev./min.  
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)											
					2.5	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0			
H	38	Hardened steel	20	RPM	2550	2120	1590	1270	1060	800	640	530	450			
	FEED			0.01~0.03	0.01~0.03	0.01~0.04	0.01~0.04	0.01~0.05	0.01~0.05	0.01~0.05	0.01~0.06	0.01~0.06				
	15			RPM	1910	1590	1190	950	800	600	480	400	340			
	39.1			FEED	0.01~0.03	0.01~0.03	0.01~0.04	0.01~0.04	0.01~0.05	0.01~0.05	0.01~0.05	0.01~0.06	0.01~0.06			
	39.3			12	RPM	1530	1270	950	760	640	480	380	320	270		
				FEED	0.01~0.03	0.01~0.03	0.01~0.04	0.01~0.04	0.01~0.05	0.01~0.05	0.01~0.05	0.01~0.06	0.01~0.06			

◎ : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron					
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended																						
ISO	N									S					H							
	Aluminum-wrought alloy			Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400Rm	1050Rm	55	60	70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	550	630	550
Recommended																						